




CERTIFICATE OF MAILING

I hereby certify that this correspondence is being deposited with the United States Postal Service as First Class Mail in an envelope addressed to:

"Assistant Commissioner for Patents
Washington, D.C. 20231"

on March 4, 2004


EDWARD A. SQUILLANTE, JR.
Reg. No. 38,319
Attorney for Applicant(s)

03/04/04
Date of
Signature

PATENT
#03-0032-UNI
Case #F3323(C)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: O'Connell
Serial No.: 10/722,783
Filed: November 26, 2003
For: BEVERAGE

Edgewater, New Jersey 07020
March 4, 2004

SUBMISSION OF PRIORITY DOCUMENT


Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Pursuant to rule 55(b) of the Rules of Practice in Patent Cases, Applicant(s) is/are submitting herewith a certified copy of the European Application No. 02258270.4 filed November 29, 2002, upon which the claim for priority under 35 U.S.C. § 119 was made in the United States.

It is respectfully requested that the priority document be made part of the file history.

Respectfully submitted,

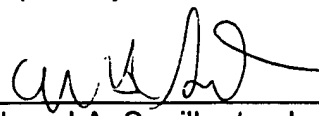
Edward A. Squillante, Jr.
Reg. No. 38,319
Attorney for Applicant(s)

EAS/mt
(201) 840-2925





**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02258270.4

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 02258270.4
Demande no:

Anmeldetag:
Date of filing: 29.11.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

UNILEVER PLC
Unilever House,
Blackfriars
London EC4P 4BQ
GRANDE BRETAGNE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Beverage

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

A23L2/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Beverage

The present invention relates to beverage products and in particular of foaming beverage products.

5

There are many examples of foaming beverages which are produced by the use of inserts inside a pressurised can. In the United Kingdom many canned beers, stouts and lagers are sold in cans which contain a so-called "widget" which operates after the can is opened to give a head on the drink which is said to be comparable to the head produced on draught drinks dispensed in EP-A-360284, EP-A-577284, US-A-4996823, US-A-5009901, WO-A-9324384, WO-A-9504689. Examples of non-alcoholic pressurised beverages which are pressurised with nitrous oxide and/or carbon dioxide are described in US-A-6403137 and GB-A-2299978.

10

Beverages that are packaged in a closed container in the presence of carbon dioxide or nitrous oxide and nitrogen are described in EP-A-745329 and EP-A-1034703. Foaming cappuccino coffee products can be made by adding to the coffee drink a creamer comprising protein, lipid and carrier and optionally a modified starch emulsifier or a surfactant as is described in US-A-6168819. Effervescent beverages which are intended to be dispensed directly into the mouth of the consumer are described in WO-A-02070371 and WO-A-02070372.

15

A first aspect of the present invention provides a beverage product comprising a container holding a liquid beverage component and sufficient nitrogen gas to give a gas pressure in the head space of at least 3.3 bar at 5°C, said liquid beverage

25

comprising an organoleptically acceptable foam-maintaining system such that when the liquid beverage is poured from the container a foam is generated, the volume of which is maintained at greater than 80% of its initial volume for a period of at
5 least 10, preferably at least 30 minutes.


Preferably, the initial volume of the foam is less than 20% of the volume of the liquid beverage.

10 The container should be of sufficient strength that it can hold the pressure of the nitrogen gas inside it and should be impermeable to nitrogen gas. The container may be made of metal e.g., aluminium or steel, a plastic material for example
15 polyethylene terephthalate or glass. The pressure of the gas in the head space within the container should preferably be in the range 3.3 to 6 bar at 5°C. The nitrogen gas may be introduced into the container in the form of liquid nitrogen. The term "nitrogen gas" as used herein is intended to include
20 pure nitrogen gas or gas mixtures that are predominantly comprised of nitrogen. Preferably the nitrogen gas has purity of >97%.

The liquid beverage component may be any consumable liquid. Examples of suitable liquids include optionally flavoured water,
25 optionally flavoured milk, fruit flavoured liquids, tea or tea flavoured liquids, coffee or coffee flavoured liquids, chocolate, chocolate flavoured liquids, fruit smoothies or alcoholic or alcohol-free drinks such as cream liqueurs or cocktails.


In a preferred embodiment, the foam-maintaining system of the liquid beverage comprises octenylsuccinic acid modified starch, and at least one surface active agent selected from the group
5 consisting of acyl lactylate salts, proteins, protein hydrolysates and sucrose esters and mixtures thereof.

The octenylsuccinic acid modified starch may be prepared by forming a covalent complex of a hydrophilic waxy maize starch
10 with an octenylsuccinic acid moiety preferably its anhydride. The production of the octenylsuccinic acid modified starch is shown in the reaction scheme below.

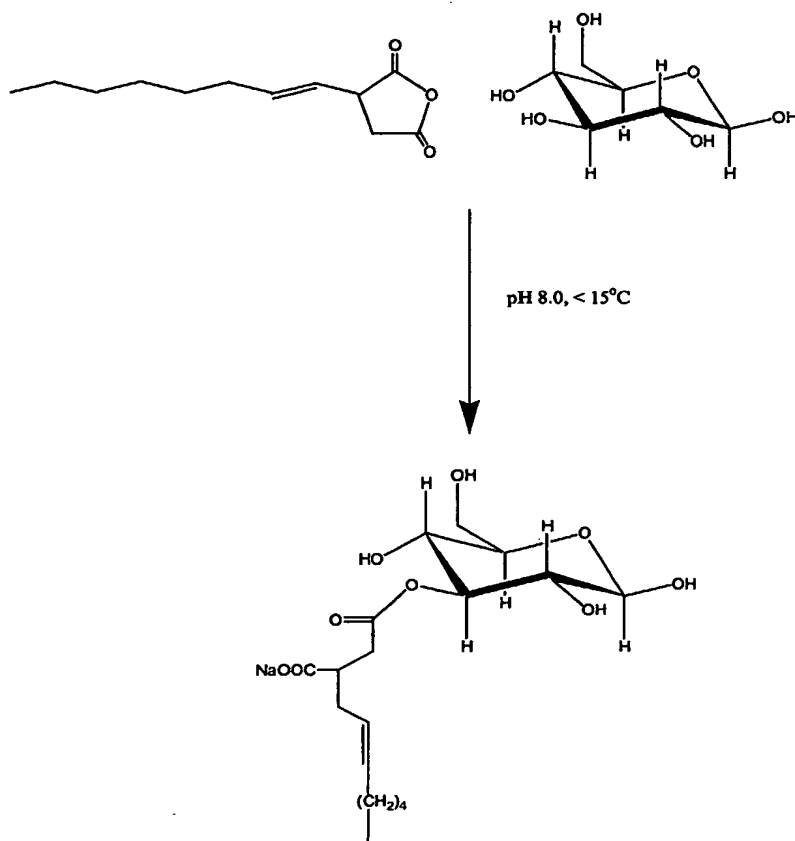

Preferably the octenylsuccinic acid is a carboxy substituted undecenoic acid of formula

5



ie 3-carboxy-undec-5-enoic acid

10

The percentage molar substitution of octenylsuccinic acid groups may be in the range of 1.9 to 3%, preferably around 2.2%. The molecular weight of the octenylsuccinic acid modified starch is preferably in excess of 100,000 kDa.

15

The octenylsuccinic acid modified starch preferably comprises 0.25 to 3.0% more preferably 0.75 to 1.5% by weight of the liquid beverage component. Suitable octenylsuccinate acid modified starch include those available from National Starch under the trade names Purity 2000, Purity 1773, Purity 539 and N-Creamer 46. A particularly preferred octenylsuccinic acid modified starch is available commercially from National Starch under the trade name N-Creamer 46

25 The viscosity of the liquid beverage component is preferably in the order of 1.5 to 100 mPa.s⁻¹, more preferably 30 to 60 mPa.s⁻¹ under low shear conditions (0.15 s⁻¹) at 5°C.

30 The acyl moiety of the acyl lactylate salt preferably contains 8 to 16 preferably 10 to 14 more preferably around 12 carbon atoms. The acyl lactylate salt may be a sodium or calcium salt.

Preferred acyl lactylate salts include calcium stearoyl lactylate and sodium stearoyl lactylate and mixtures thereof. The acyl lactylate salt preferably comprises 0.005 to 1 %, more preferably 0.01 to 0.5% by weight of the liquid beverage.

5

Suitable proteins and protein hydrolysates are those contained in or derived from milk for example caseinate salts such as sodium caseinate, whey protein isolates or milk protein hydrolysates. The protein and/or protein hydrolysate preferably
10 comprises 0.01 to 0.5 %, more preferably 0.1 to 0.3% by weight of the liquid beverage.

Sucrose esters are esters prepared from sucrose and fatty acids derived from edible fats and oils. Preferred sucrose esters are
15 predominantly monoesters. The fatty acid moiety preferably contains 8 to 16 carbon atoms. Suitable fatty acids include caprylic acid, lauric acid, myristic acid, palmitic acid, stearic acid and mixtures thereof. Suitable sucrose esters are commercially available from Ryoto under the trade names P-1570
20 (70% monoester with fatty acids derived from vegetable oils containing 70% palmitic acid) and M-1695 (80% monoester with fatty acids derived from vegetable oils containing 95% myristic acid). The sucrose ester preferably comprises 0.02 to 0.4%, more preferably 0.05 to 0.3% of the liquid beverage.

25

In preferred beverage products of the present invention the surface active agent comprises an acyl lactylate salt either alone or in combination with a sucrose ester, a protein or a protein hydrolysate.

The surface tension of the liquid beverage component should be in the order of 65 to 20 N.m⁻², more preferably 40-20 N.m⁻².

- 5 The beverages of the present invention may contain additional constituents. Examples of suitable additional constituents include:-
- (a) sweeteners for example natural sweeteners such as sugars (glucose, fructose, sucrose or corn syrup) or artificial
 - 10 sweeteners such as saccharin, aspartame or acesulfam.
 - (b) Preservatives for example benzoate or sorbate salts
 - (c) Antioxidants for example ascorbic acid or salts thereof or tocopherols
 - (d) Flavour enhancers for example maltol
 - 15 (e) Flavourings for example fruit flavours or vanilla
 - (f) pH adjusting agents for example sodium bicarbonate
 - (g) viscosity adjusting agents for example propylene glycol alginate, carboxymethyl cellulose, high methoxy pectin and/or gums such as guar gum

20

A second aspect of the present invention provides a method of making a beverage product comprising a container holding a liquid beverage component and nitrogen gas, said liquid beverage comprising an organoleptically acceptable foam-maintaining

25 system, said method comprising the steps of:-

- incorporating the organoleptically acceptable foam-maintaining system into the liquid beverage,
- placing the liquid beverage into the container,

adding sufficient liquid nitrogen to the container to provide a head space pressure of 3.3 to 6 bar at 5°C in the container after sealing, and sealing the container.

5

A third aspect of the present invention provides a method of making a beverage product comprising a container holding a liquid beverage component and nitrogen gas, said liquid beverage comprising octenylsuccinic acid modified starch, and at least one surface active agent selected from the group consisting of acyl lactylate salts, proteins, protein hydrolysates and sucrose esters and mixtures thereof, said method comprising the steps of:-

15 incorporating the octenylsuccinic acid modified starch and the at least one surface active agent into the liquid beverage, placing the liquid beverage into the container, adding sufficient liquid nitrogen to the container to provide a head space pressure of 3.3 to 6 bar at 5°C in the
20 container after sealing, and sealing the container.

The contents of the sealed container may be sterilised after sealing by the application of heat for example by pasteurisation
25 or retorting. Alternatively the product may be subjected to microfiltration or may be filled aseptically.

The present invention provides a beverage which is retained under pressure inside the container before the container is

opened but when the nitrogen becomes supersaturated after the container is opened, comes out of solution and forms a stable foam on top of the liquid beverage. In the beverage products of the present invention no widget is required to achieve this. The
5 presence of the foam on top of the dispensed liquid beverage provides a pleasant drinking experience (eg a pleasant taste and creamy mouthfeel) to the consumer as the beverage is consumed. The product may be consumed straight from the container but is preferably poured into a drinking vessel for
10 example a glass before consumption.

The invention will be illustrated by the following non-limiting examples

15

Example 1

A milked tea beverage was made as described below.

- 20 1) Black tea leaf tea (0.6kg) was extracted with water (18L) at $90 \pm 1^{\circ}\text{C}$ for 3 minutes. The infusion was then passed through a 20 mesh screen, followed by a 150 mesh screen and cooled to $20-30^{\circ}\text{C}$. The infusion was then clarified using a centrifuge.
- 25 2) Sugar (5.5kg) was dissolved in hot water (6L), sterilised by UV treatment and added to the tea extract.
- 3) UHT-treated skimmed milk (10.6kg) was added to the resulting mixture
- 4) Sodium ascorbate (0.05kg) was dissolved in water (2L) and the solution added to the mixture.

- 5) Water was added to a volume of 100L
- 6) The mixture was homogenised at 60-70°C @ 200 kgf.cm⁻² and heated to 85°C
- 7) Skimmed milk powder (1.106kg) was added and mixed at
5 13,500rpm for 2 minutes.
- 8) Sodium stearoyl lactylate (0.5kg) was added and mixed at 13,500 rpm for 2 minutes
- 9) N-Creamer 46 modified starch (1kg - ex National Starch) was added and mixed at 13,500 rpm for 2 minutes at 65°C.
- 10 10) The resulting solution was cooled to 10°C and maltol (0.03kg) was added The mixture (<295ml) was filled into standard 330ml beverage cans and sufficient liquid nitrogen was injected into the cans to give a head space pressure of 3.5 ± 0.2 bar at 5°C. The cans were then rapidly sealed.
- 15 11) The sealed cans were then retorted at 140°C for 5 minutes

The resulting beverage contained the following constituents

Constituent	Amount
Water	to 100%
UHT milk	10.60 %
Granulated sugar	5.5%
Tea solids	0.2%
Skimmed milk powder	1.16%
Tea flavour mix 06	0.16%
Sodium ascorbate	0.05%
Maltol	0.03%
N-Creamer 46	1.0%
Sodium stearoyl lactylate	0.5%

Example 2

A tea beverage was made as described below.

- 5 (1) Leaf tea (0.65 kg) was extracted with water (90L) at $90 \pm 1^\circ\text{C}$ for 5 min. The infusion was then passed through 4 layers of muslin cloth and the temperature was held at 70°C .
- (2) Sodium bicarbonate (0.01 kg) was dissolved in the filtered infusion
- 10 (3) Sugar (3.9 kg) was dissolved in the infusion at 70°C by stirring gently for 1 minute.
- (4) Caramel (0.1kg) was added to the infusion at 70°C
- (5) Sodium stearoyl lactylate (0.5kg) added and mixed at 13,500 rpm for 2 minutes
- 15 (6) N-Creamer 46 starch (1kg) added and mixed at 13,500 rpm for 2 minutes at 65°C
- (7) The resulting solution was cooled to 10°C
- (8) Maltol (0.03kg) was added
- (9) Sodium ascorbate (0.05kg) was dissolved in water (2L) and
- 20 added to the mixture
- (10) Tea aroma concentrate (2 kg) was added and the mixture was made up to 100l with water.
- (11) The beverage mixture (<295ml) was filled into standard
- 25 330ml aluminium cans
- (12) Liquid nitrogen was injected in order to give a head space pressure of 3.5 ± 0.2 bar at 5°C and the cans were sealed rapidly.
- (13) The mixture was then retorted at 140°C for 5 minutes.

The resulting beverage contained the following constituents

Constituents	Amount
Water	to 100%
Tea solids	0.21%
Sugar	3.9%
Tea aroma concentrate	2.0%
Sodium ascorbate	0.05%
Sodium bicarbonate	0.01%
N-creamer 46	1.0%
Sodium stearoyl lactylate	0.5%
Maltol	0.03%
Caramel	0.1%

5

Example 3

An Irish coffee-type beverage was made as described below.

- (1) Water (81.2 kg) was heated to 75°C
- 10 (2) Sugar (3.5kg) was added and completely dissolved at 70°C
- (3) A mixture of sodium stearoyl lactylate (0.05kg), calcium stearoyl lactylate (0.05kg) and sucrose monoesters (0.2kg) was added and mixed at 13,500 rpm at 70°C
- (4) Skim milk powder (1.0kg) was added and mixed at 13,500 rpm
15 at 70°C
- (5) N-Creamer 46 (1.0 kg) was added and mixed at 13,500 rpm at 70°C

- (6) Instant coffee powder (0.8 kg) was added and dissolved at 60°C
- (7) The mixture was cooled to ambient temperature and whiskey (12.2kg) was added
- 5 (8) The beverage (<295ml) was placed in a standard aluminium can (330ml) and sufficient liquid nitrogen was added to give a head pressure of 3.5 ± 0.2 bar at 5°C and can was sealed rapidly. Note. The product was filled and nitrogenated under aseptic conditions.

10

The resulting beverage contained the following constituents

Constituent	Amount
water	to 100%
sugar	3.50%
Sodium stearyl lactylate	0.05%
Calcium stearyl lactylate	0.05%
Sucrose monoesters	0.20%
Skimmed milk powder	1.0%
N-creamer 46	1.0%
coffee	0.80%
whiskey	12.20%

Example 4

15

A raspberry flavoured smoothie type beverage was made as described below.

- (1) Water (90 kg) is heated to 75°C

- (2) Sugar (4 kg) is added and completely dissolved at 70°C
- (3) Sodium stearyl lactylate (0.5 kg) is added and mixed at 13,500 rpm at 70°C
- 5 (4) Skim milk powder (1 kg) is added and mixed at 13,500 rpm at 70°C
- (5) N-Creamer 46 (1 kg) is added and mixed at 13,500 rpm at 70°C
- (6) pH of solution is increased to pH 7.0 using 1.0M NaOH
- 10 (7) Cooled to ambient temperature and raspberry juice (10 kg) is added. The pH of the solution is maintained at pH 6.5 with the addition of 1.0M NaOH
- (8) The beverage (<295ml) was placed in a standard aluminium can (330mL).
- 15 (9) Sufficient liquid nitrogen was added to give a head pressure of 4 bar at 5°C and the can was sealed rapidly.
- (10) The can was retorted at 121°C for 5min.

The resulting beverage contained the following constituents

20

Constituent	Amount
Water	to 100%
Raspberry juice	10%
Sugar	4%
N-creamer 46	1%
Sodium stearyl lactylate	0.5%
Skim milk powder	1%
Vanilla	0.05%

Example 5

5 A milked tea beverage was made as described below.

- (1) Black tea leaf tea (0.6kg) was extracted with water (80L) at $90 \pm 1^\circ\text{C}$ for 3 minutes. The infusion was then passed through a 20 mesh screen, followed by a 150 mesh screen and
10 cooled to $20-30^\circ\text{C}$. The infusion was then clarified using a centrifuge.
- (2) Sugar (5.5kg) was dissolved in hot water (6L), sterilised by UV treatment and added to the tea extract.
- (3) UHT-treated skimmed milk (10.6kg) was added to the
15 resulting mixture
- (4) Sodium ascorbate (0.05kg) was dissolved in water (2L) and the solution added to the mixture.
- (5) Water was added to a volume of 90L
- (6) The mixture was homogenised at $60-70^\circ\text{C}$ at 19.6kPa. [200
20 kgf.cm^{-2}] and heated to 85°C
- (7) Skimmed milk powder (1kg) was added and mixed at 13,500rpm for 2 minutes.
- (8) Sodium stearyl lactylate (0.06kg) was added and mixed at 13,500 rpm for 2 minutes
- 25 (9) N-Creamer 46 modified starch (1.25kg - ex National Starch) was added and mixed at 13,500 rpm for 2 minutes at 65°C .
- (10) 0.2kg of milk protein hydrolysate (Hyfoama, ex. Quest) and dissolved thoroughly at 65°C

- 15 -

(11) The resulting solution was cooled to 10°C and maltol (0.03kg) was added.

(12) The solution was made to 100L with water.

(13) The mixture (<295ml) was filled into standard 330ml

5 beverage cans and sufficient liquid nitrogen was injected into the cans to give a head space pressure of 3.5 ± 0.2 bar at 5°C. The cans were then rapidly sealed.

(14) The sealed cans were then retorted at 140°C for 5 minutes

10 The resulting beverage contained the following constituents

Constituent	% solids
Water	to 100%
UHT milk	10.60 %
Granulated sugar	5.5%
Sucrose esters (P1570)	0.1%
Hydrolysed milk protein (Hyfoama DS, Quest)	0.2%
Tea solids	0.2%
Skimmed milk powder	1%
Tea flavour mix 06	0.16%
Sodium ascorbate	0.05%
Maltol	0.03%
N-Creamer 46	1.25%
Sodium stearoyl lactylate	0.06%

Example 6

5

In a similar way to that described above in Example 3, samples of beverages which had the same constituents as Example 3 were prepared except that Comparative Example A did not contain any surface active agents and comparative Example B did not contain
10 any octenylsuccinic acid modified starch. The products were stored at 5°C for 3 hours and were then opened and poured into a graduated glass vessel. The amount of foam generated as the beverage was poured was determined from the graduations on the glass vessel. The amount of foam expressed as a percentage of
15 the volume of foam present immediately after pouring was determined periodically for the beverage of Example 3 and for both of the Comparative Examples A and B. The results are shown in the Table below

20

25

	Example 3	Example A	Example B
Foam volume	6.34%	6.66%	7.93%
Time (minutes)	Foam volume as % of volume at t_0		
2.5	100	100	100
5	100	75	100
10	100	50	60
15	100	50	44
20	100	50	20
30	95	40	20
40	90	35	12
60	90	25	8

5

From the Table it can be seen that the foam generated from Example 3 lasts considerably longer than the foam generated from either of the Comparative Examples.


10

CLAIMS

- 1) A beverage product comprising a container holding a liquid
beverage component and sufficient nitrogen gas to give a gas
5 pressure in the head space of at least 3.3 bar at 5°C, said
liquid beverage comprising an organoleptically acceptable
foam-maintaining system such that when the liquid beverage is
poured from the container a foam is generated, the volume of
which is maintained at greater than 80% of its initial volume
10 for a period of at least 10 minutes.
- 2) A beverage product as claimed in claim 1 wherein the volume
of the foam is maintained at greater than 80% of its initial
volume for a period of at least 30 minutes.
15
- 3) A beverage product as claimed in claim 1 wherein the initial
volume of the foam is less than 20% of the volume of the
liquid beverage.
- 20 4) A beverage product as claimed in claim 1 wherein the pressure
of nitrogen in the head space of the container is in the
range 3.3 to 6 bar at 5°C.
- 5) A beverage product as claimed in any one of claims 1 to 3
25 wherein the foam maintaining system of the liquid beverage
comprising octenylsuccinic acid modified starch, and at least
one surface active agent selected from the group consisting
of acyl lactylate salts, proteins, protein hydrolysates and
sucrose esters and mixtures thereof.

6) A beverage product as claimed in claim 5 wherein the octenylsuccinic acid modified starch is prepared by forming a covalent complex of a hydrophilic waxy maize starch with an octenylsuccinic acid moiety

7) A beverage product as claimed in claim 5 or claim 6 wherein the octenylsuccinic acid is a carboxy substituted undecenoic acid of formula



8) A beverage product as claimed in any one of claims 5 to 7 wherein the percentage molar substitution of octenylsuccinic acid groups in the range of 1.9 to 3%.

9) A beverage product as claimed in any one of claims 5 to 7 wherein percentage molar substitution of octenylsuccinic acid groups is around 2.2%.

10) A beverage product as claimed in any one of claims 5 to 9 wherein molecular weight of the octenylsuccinic acid modified starch is in excess of 100,000 kDa.

- 11) A beverage product as claimed in any one of claims 5 to 10 wherein the octenylsuccinic acid modified starch comprises 0.25 to 3.0% by weight of the liquid beverage component.
- 5 12) A beverage product as claimed in any one of claims 5 to 10 wherein the octenylsuccinic acid modified starch comprises 0.75 to 1.5% by weight of the liquid beverage component.
- 10 13) A beverage product as claimed in any one of claims 5 to 12 wherein the acyl moiety of the acyl lactylate contains 8 to 16 carbon atoms.
- 15 14) A beverage product as claimed in claim 13 wherein the acyl moiety of the acyl lactylate salt contains 10 to 14 carbon atoms.
- 20 15) A beverage product as claimed in claim 13 wherein the acyl moiety of the acyl lactylate salt contains around 12 carbon atoms.
- 25 16) A beverage product as claimed in any one of claims 5 to 15 wherein the acyl lactylate salt is a sodium or calcium salt
- 17) A beverage product as claimed in any one of claims 5 to 16 wherein the acyl lactylate salt is calcium stearoyl lactylate, sodium stearoyl lactylate or mixtures thereof.

- 18) A beverage product as claimed in any one of claims 5 to 17 wherein the acyl lactylate salt comprises 0.005 to 1% by weight of the liquid beverage.
- 5 19) A beverage product as claimed in any one of claims 5 to 17 wherein the acyl lactylate salt comprises 0.01 to 0.5% by weight of the liquid beverage.
- 10 20) A beverage product as claimed in any one of claims 5 to 19 wherein the proteins and protein hydrolysates are those contained in or derived from milk
- 15 21) A beverage product as claimed in any one of claims 5 to 20 wherein the proteins and protein hydrolysates are selected from sodium caseinate, whey protein isolates or milk protein hydrolysates
- 20 22) A beverage product as claimed in any one of claims 5 to 21 wherein the sucrose ester is predominantly a monoester.
- 25 23) A beverage product as claimed in any one of claims 5 to 22 wherein the sucrose ester is prepared from sucrose and fatty acids derived from edible fats and oils, said fatty acids containing 8 to 16 carbon atoms
- 24) A beverage product as claimed in claim 23 wherein the fatty acid is caprylic acid, lauric acid, myristic acid, palmitic acid, stearic acid or mixtures thereof

25) A beverage product as claimed in any one of claims 5 to 24 wherein the sucrose ester comprises 0.02 to 0.4% by weight of the liquid beverage.

5 26) A beverage product as claimed in any one of claims 5 to 24 wherein the sucrose ester comprises 0.05 to 0.3% by weight of the liquid beverage.

10 27) A method of making a beverage product comprising a container holding a liquid beverage component and nitrogen gas, said liquid beverage comprising an organoleptically acceptable foam-maintaining system, said method comprising the steps of:-
incorporating the organoleptically acceptable foam-
15 maintaining system into the liquid beverage,
placing the liquid beverage into the container,
adding sufficient liquid nitrogen to the container to provide
a head space pressure of 3.3 to 6 bar at 5°C in the
container after sealing, and
20 sealing the container.

28) A method of making a beverage product comprising a container holding a liquid beverage component and nitrogen
25 gas, said liquid beverage comprising octenylsuccinic acid modified starch, and at least one surface active agent selected from the group consisting of acyl lactylate salts, proteins, protein hydrolysates and sucrose esters and mixtures thereof, said method comprising the steps of:-

incorporating the octenylsuccinic acid modified starch and
the at least one surface active agent into the liquid
beverage,

placing the liquid beverage into the container,

- 5 adding sufficient liquid nitrogen to the container to provide
a head space pressure of 3.3 to 6 bar at 5°C in the
container after sealing, and
sealing the container.

ABSTRACT

A beverage product comprises a container holding a liquid
5 beverage component and sufficient nitrogen gas to give a gas
pressure in the head space of at least 3.3 bar at 5°C, said
liquid beverage comprising an organoleptically acceptable foam-
maintaining system such that when the liquid beverage is poured
from the container a foam is generated, the volume of which is
10 maintained at greater than 80% of its initial volume for a
period of at least 10, preferably at least 30 minutes. The
initial volume of the foam may be less than 20% of the volume of
the liquid beverage. The foam-maintaining system may comprise
octenylsuccinic acid modified starch, and at least one surface
15 active agent selected from the group consisting of acyl
lactylate salts, proteins, protein hydrolysates, sucrose esters,
and mixtures thereof.

